



SPITA Self-fusing silicone tape
ResQ-tape


PERFECT GRIP



SPITA ResQ-tape Perfect Grip is self-fusing silicone tape with a unique pattern of comfortable ridges. Easy to use on all kind of tools, sports equipment, handrails, etc. to achieve a secure handle or improved grip.

CONSTRUCTION

Material	Self-fusing silicone rubber
Liner	Polystyrene
Thickness	1,7 mm
Width	33 mm
Length	1,2 meter
Profile	3 ridges
Available colors	Black, clear, red, blue, white & grey

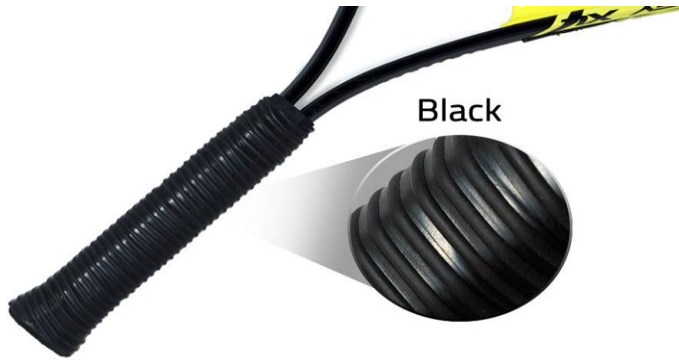

FEATURES

- Heat resistant up to 260° Celsius
- Remains flexible till -60° Celsius
- UV-resistant
- Chemical resistant
- Insulates minimum 15,000 Volt per layer (Class H)
- Resists fuels, oil, acids, solvents and salt
- Works on every surface without preparation
- Easy to apply and to remove leaving no residue
- No adhesive – only bonds to itself
- Meets UL 510 requirements

STORAGE / HANDLING / SHELF LIFE / LIFESPAN

Storage	Store in a cool, dry area and keep away from direct sunlight.
Handling	Keep tape roll clean and free of dust, dirt or debris.
Shelf life	> 3 years
Life span	> 20 years (after application)

User instructions

- 1) Peel plastic liner away from tape.
- 2) Press tape firmly on handle, hold in place and wrap completely over itself one time.
- 3) Stretch tape 50% and begin wrapping tape with 50% overlap, aligning the ridges.
- 4) Continue wrapping until desired grip length is achieved.
- 5) Wrap the last layer completely over itself and press the tape firmly for a quick bond.
- 6) To create smooth finish, use a utility knife to trim the top and bottom edges.



SPECIFICATIONS

Property	Test method	Value
Continuous Temperature Range		-54°C to +232°C
Intermittent Temperature Range (24hrs max)		-60°C to +260°C
Cold Brittle Point Max	ASTM D-2137	-65°C
Water absorption	Fed STD601 Method6251	3% Max by weight
Tensile strength	ASTM D-412	700 PSI minimum
Elongation	ASTM D-412	300% minimum
Dielectric Strength	ASTM D-412	15 kV per layer
Durometer Hardness		50 Shore A
Thickness Tolerance		+/- .05 mm
Width Tolerance		+/- 3.175 mm



SPITA Smart Products B.V.
 Industrieweg 18-9
 3846 BD HARDERWIJK (NL)
 Tel.: +31 341 414 993
 e-mail: sales@spita.eu
www.resqtape.eu



Attention: This product is provided without warranty, either expressed or implied, of fitness for a specific purpose. Because conditions and methods of use are beyond the manufacturer's control, neither manufacturer nor seller will assume any responsibility for the use or misuse of this product. This includes, but is not limited to, any consequential damages.

SPITA ResQ-tape is a trademark of G&G Investments B.V., Zeewolde (NL).

Powered by